



UPPER AND LOWER INSULATION SHELL



Product description

The insulation shell covers and insulates the connected pipes on the 25 and 50 m² solar stations. If the insulation shells are fitted to the tank they cover the connected pipes between the solar station and the tank pipes below the solar station and the connected pipes to the collector on the tank above the solar station. It can be used universally for upper and lower insulation, and for wall mounting.

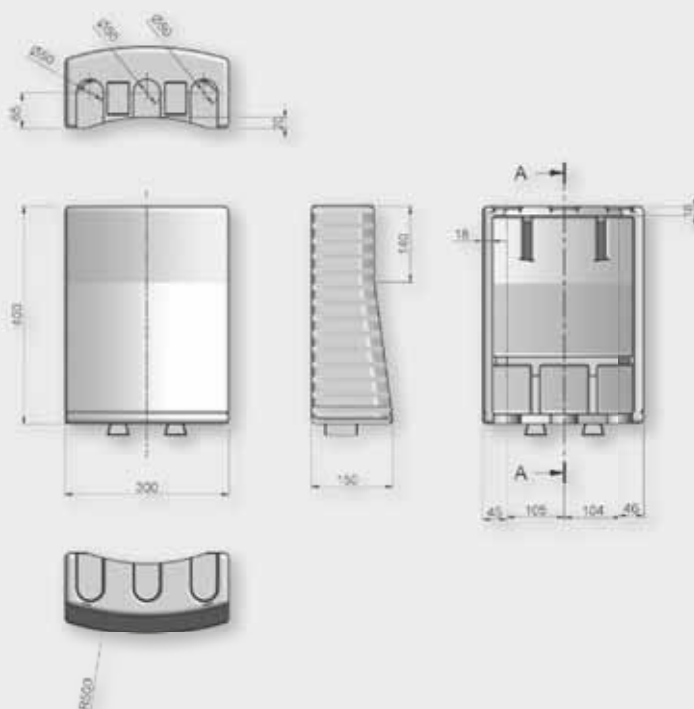

Specifications

Type	IS-U/O
Item no.	1510321
Material	EPP
Max. temperature	120 °C
Short-term temperature	180 °C
Thermal conductivity (λ)	0.041 W/(m.K)
Suitable for piping	DN 20, 22 mm, 28 mm
Suitable for solar stations	SF25/50, SSR25/50, SSRH 50
Suitable for tank	FS/1R